

FIG.1

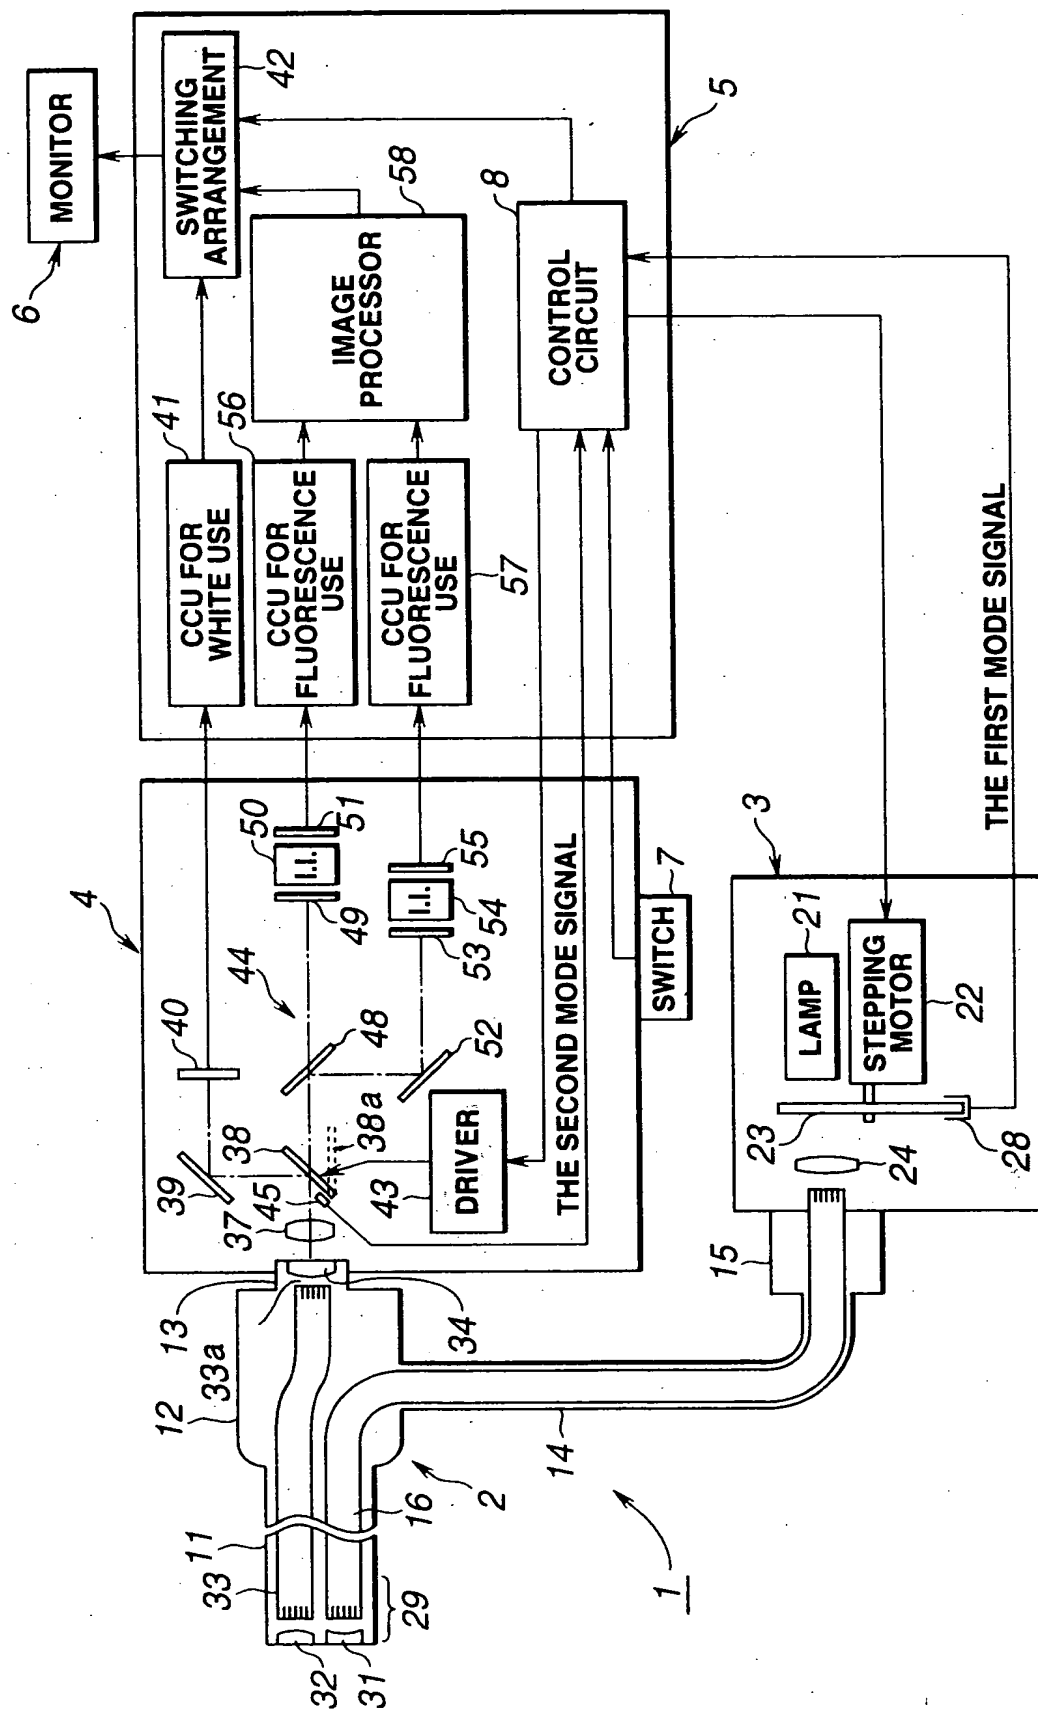


FIG.2


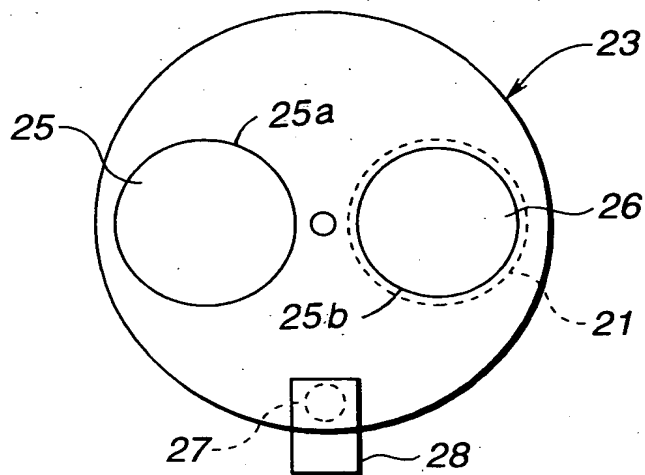


FIG.3

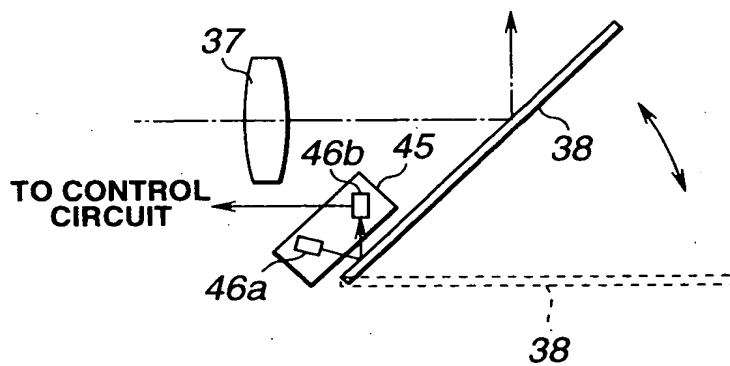

10045979-011002
200710 02654001

FIG.4

SWITCHING CONDITION OF EACH DEVICE		CAMERA CONDITION
LIGHT SOURCE DEVICE	CONTROL CENTER	
OFF	OFF	INOPERATIVE
ON	OFF	INOPERATIVE
OFF	ON	WHITE LIGHT MODE
ON	ON	WHITE LIGHT MODE
ON (PHOTOCOUPLER)- (PHOTOCOUPLER)+	ON	WHITE LIGHT MODE
		FLUORESCENCE MODE

FIG.6


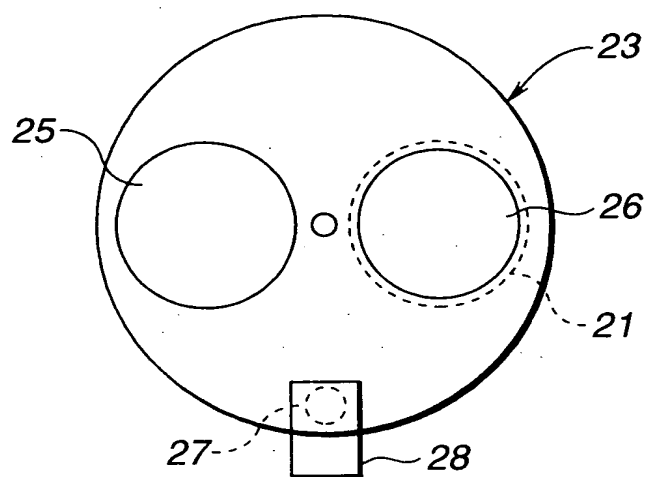


FIG.7

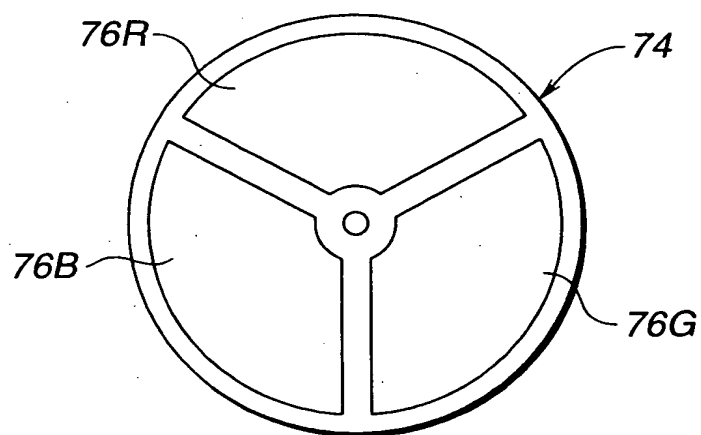

20071016253001

FIG.8

SWITCHING CONDITION OF EACH DEVICE		CAMERA SHUTTER
LIGHT SOURCE DEVICE	CONTROL CENTER	
OFF	OFF	CLOSED
ON	OFF	CLOSED
OFF	ON	CLOSED
ON	ON	CLOSED
ON (PHOTOCOUPLER)- ON (PHOTOCOUPLER)+	ON	CLOSED
		OPEN

FIG.9

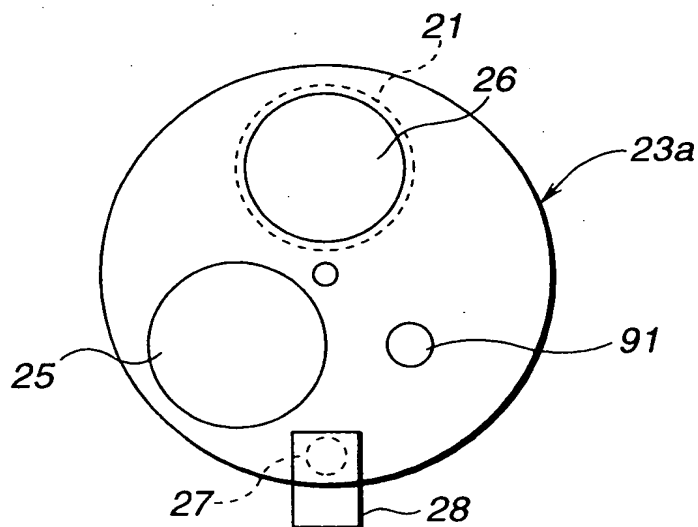


FIG.10



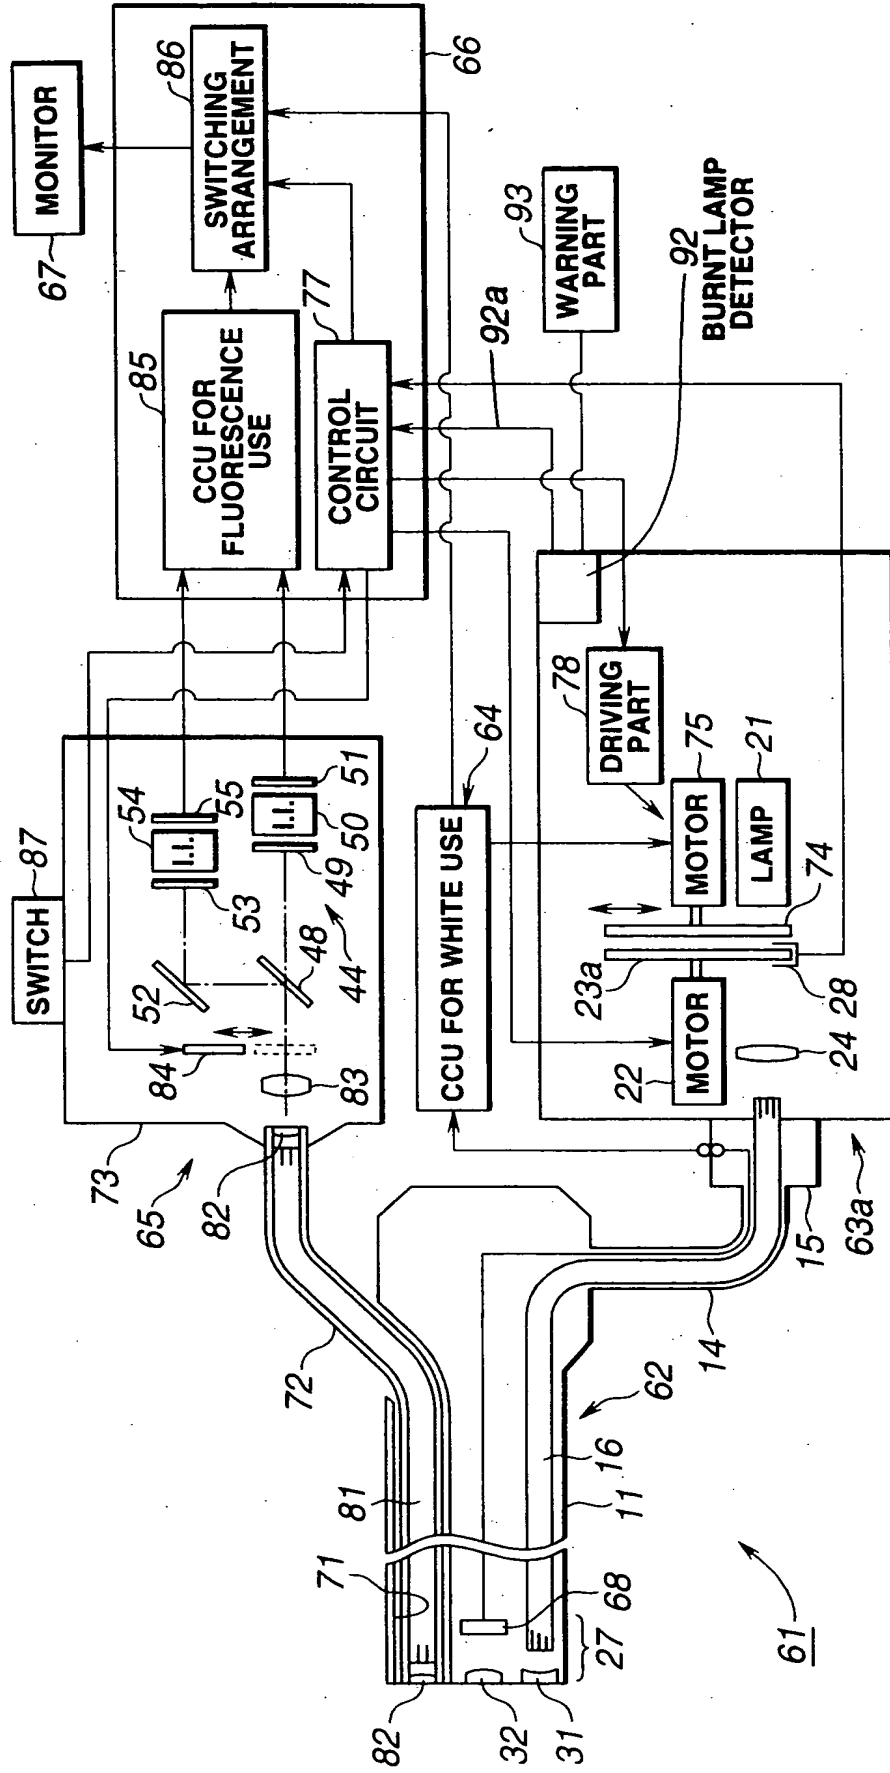


FIG.11

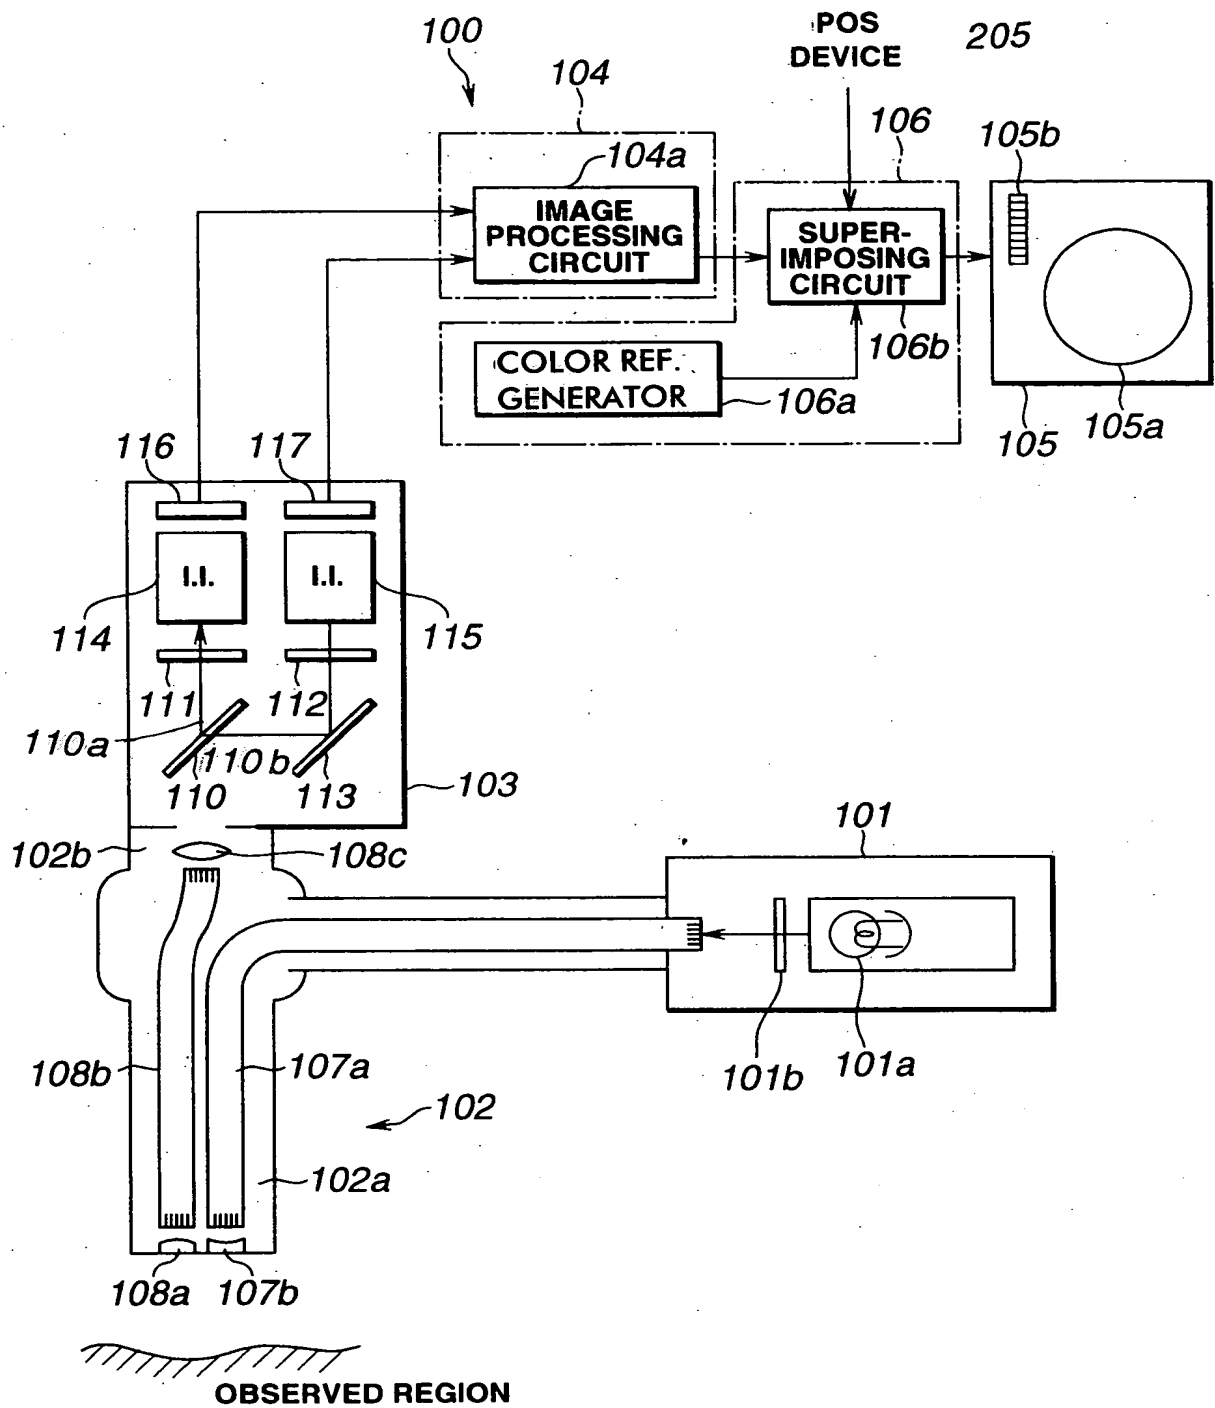

10045979.04400
200710 62654007

FIG.12

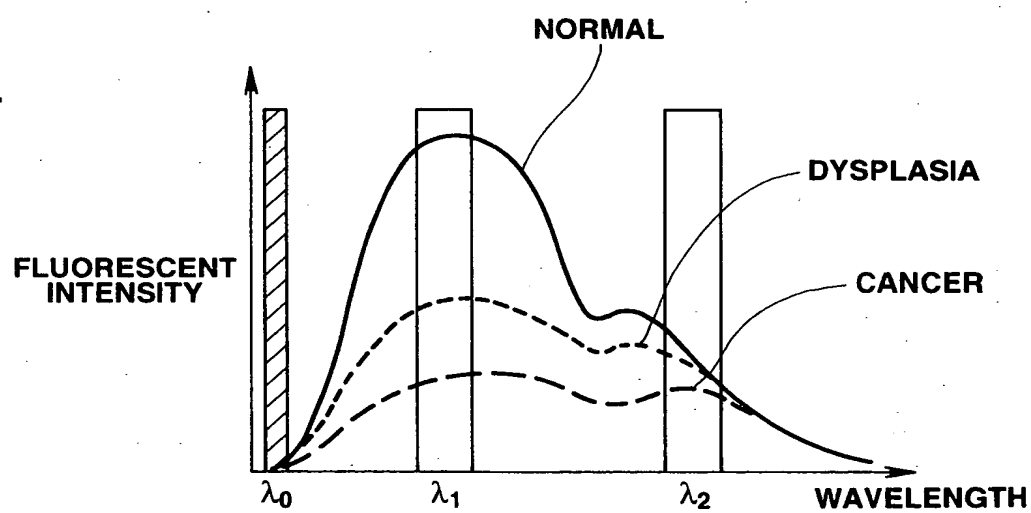

20010-0451001

FIG.13

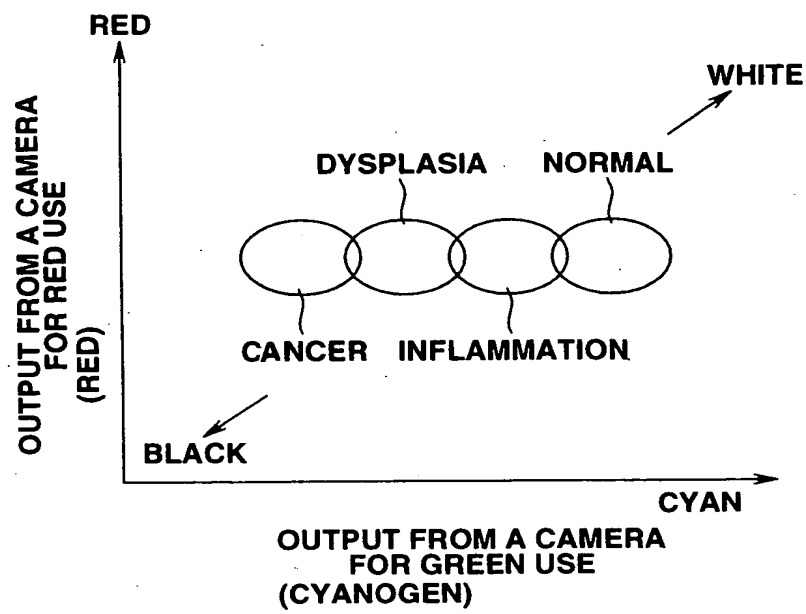


FIG.14


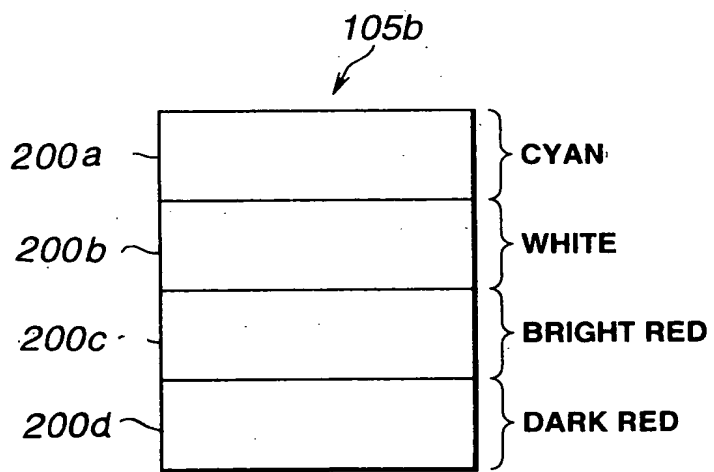


FIG.15

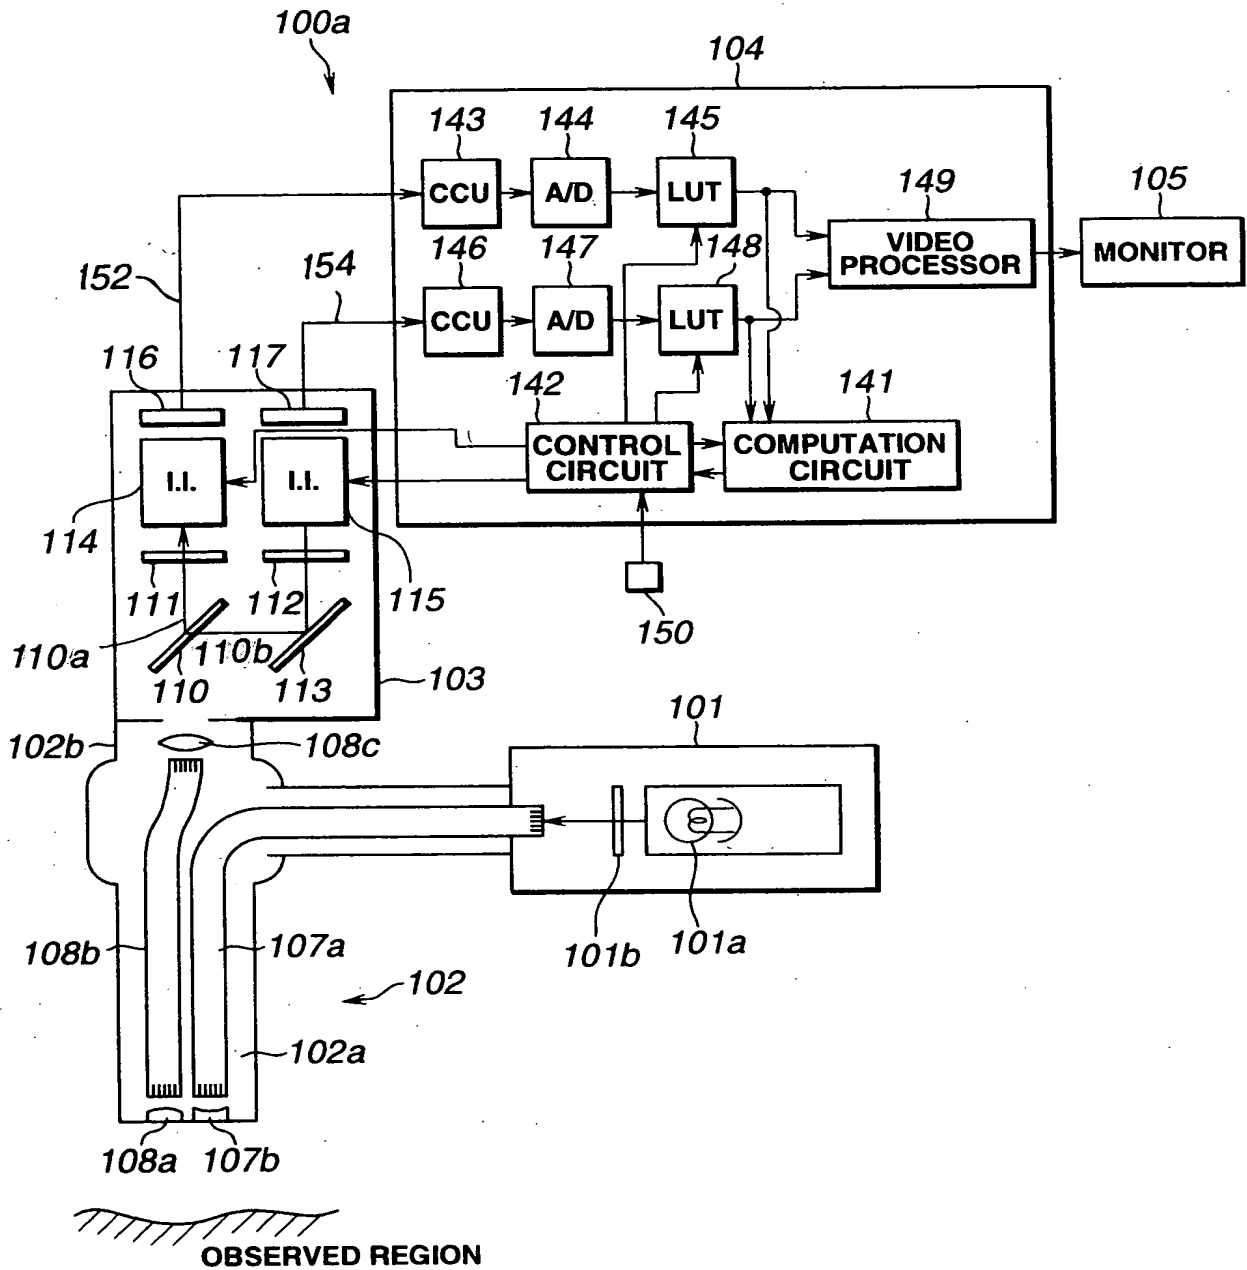

100497.0100
200710 62654001

FIG.16A

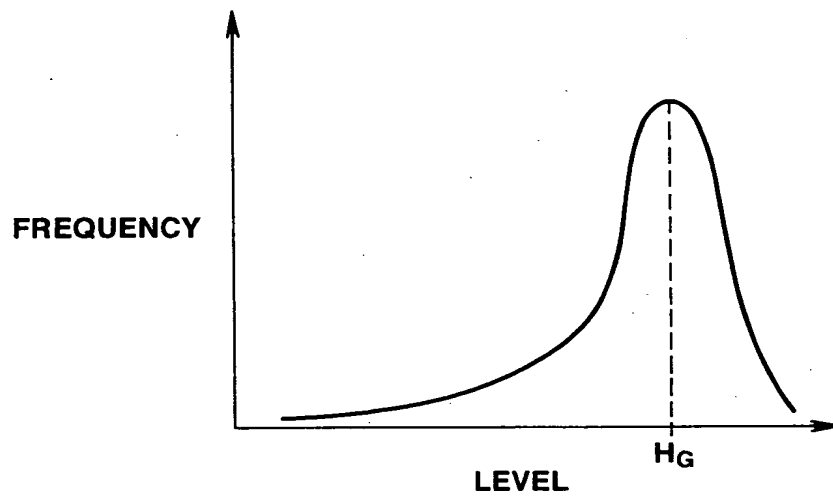


FIG.16B


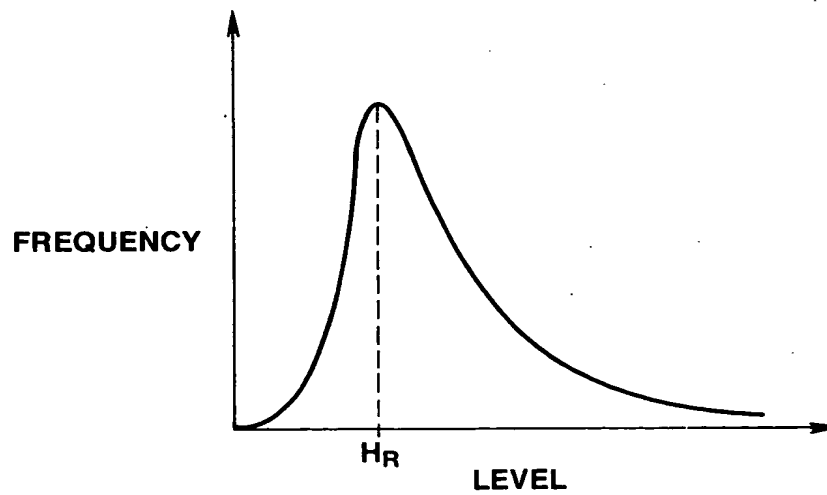


FIG.17

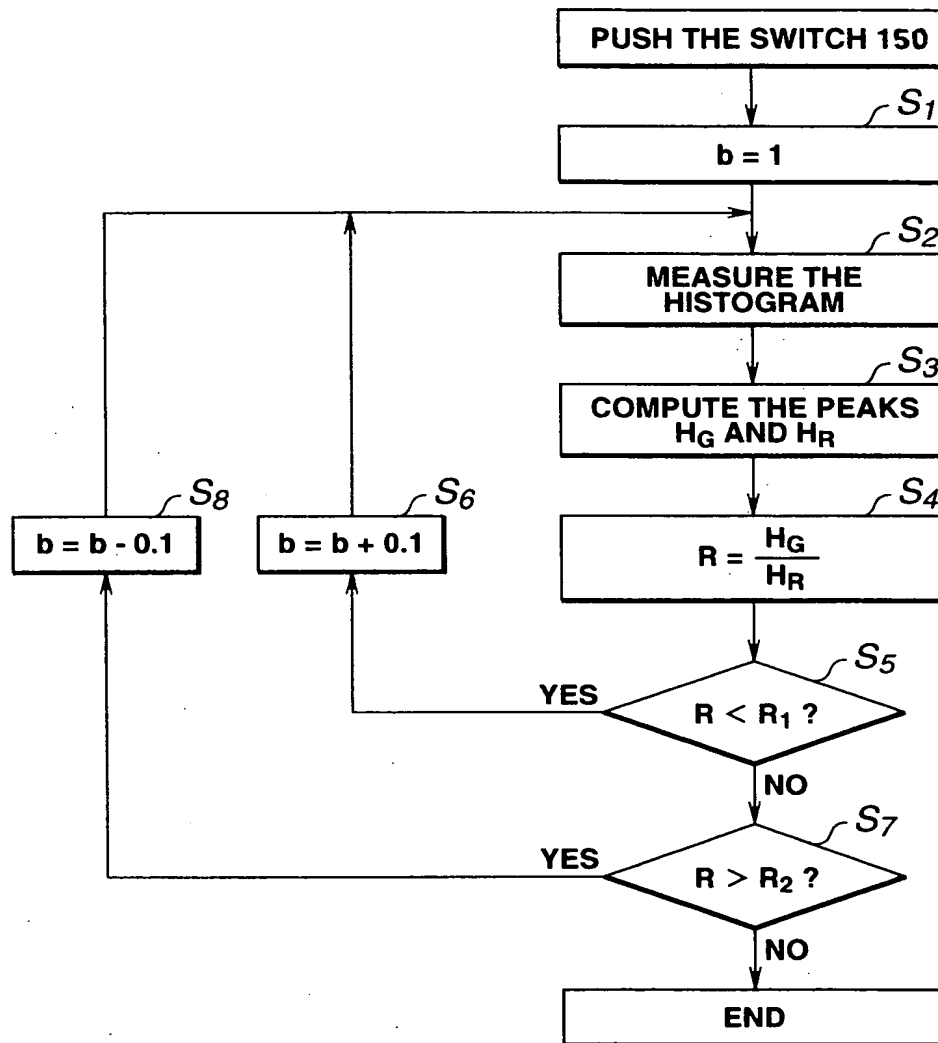

2001-10-06 09:00

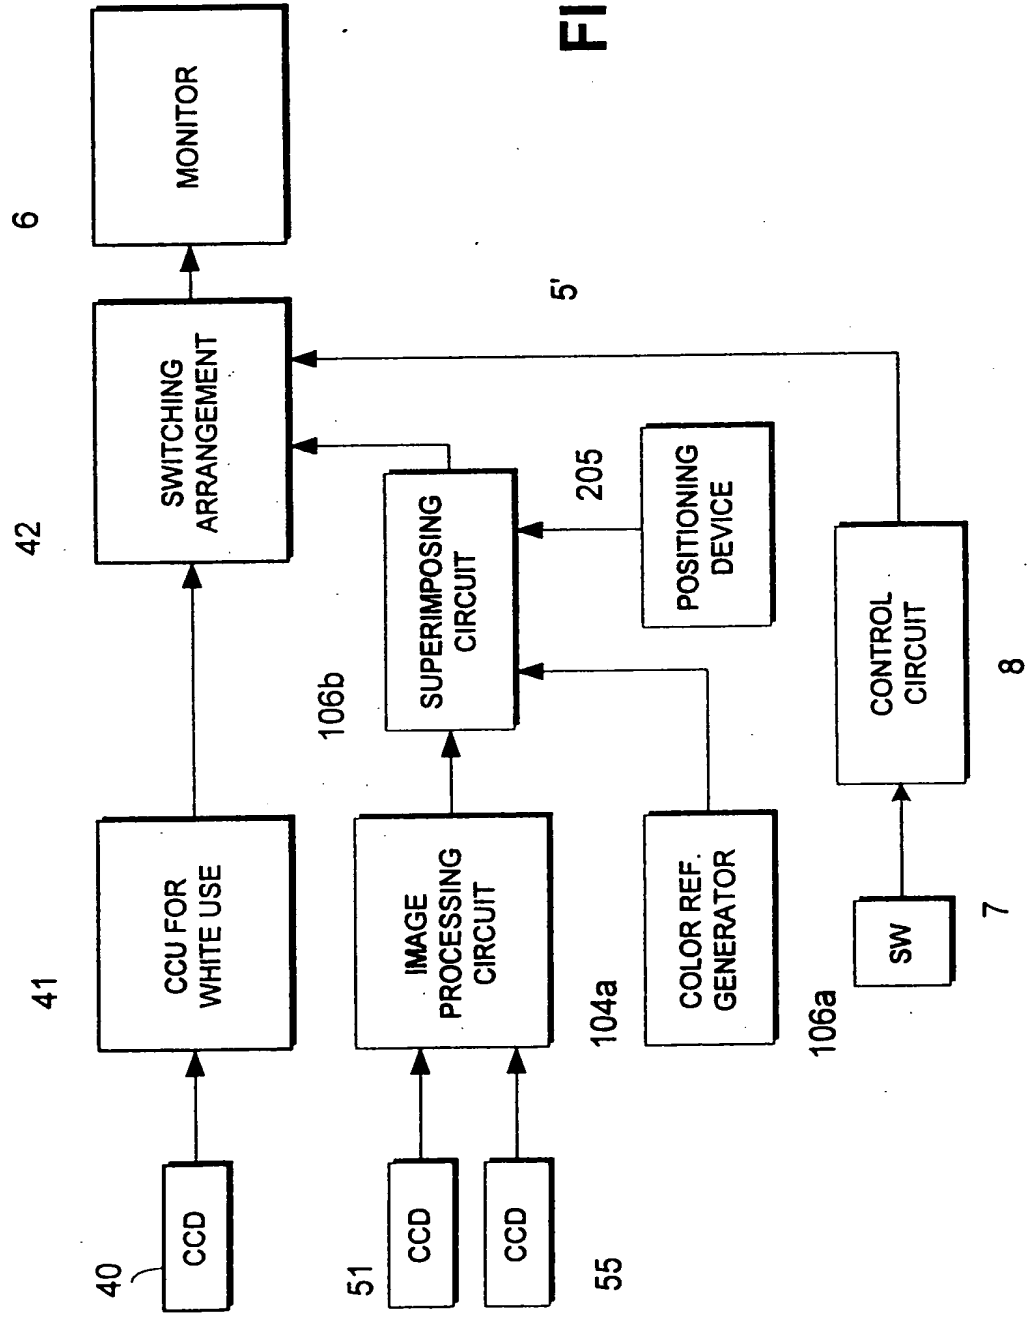


FIG. 18

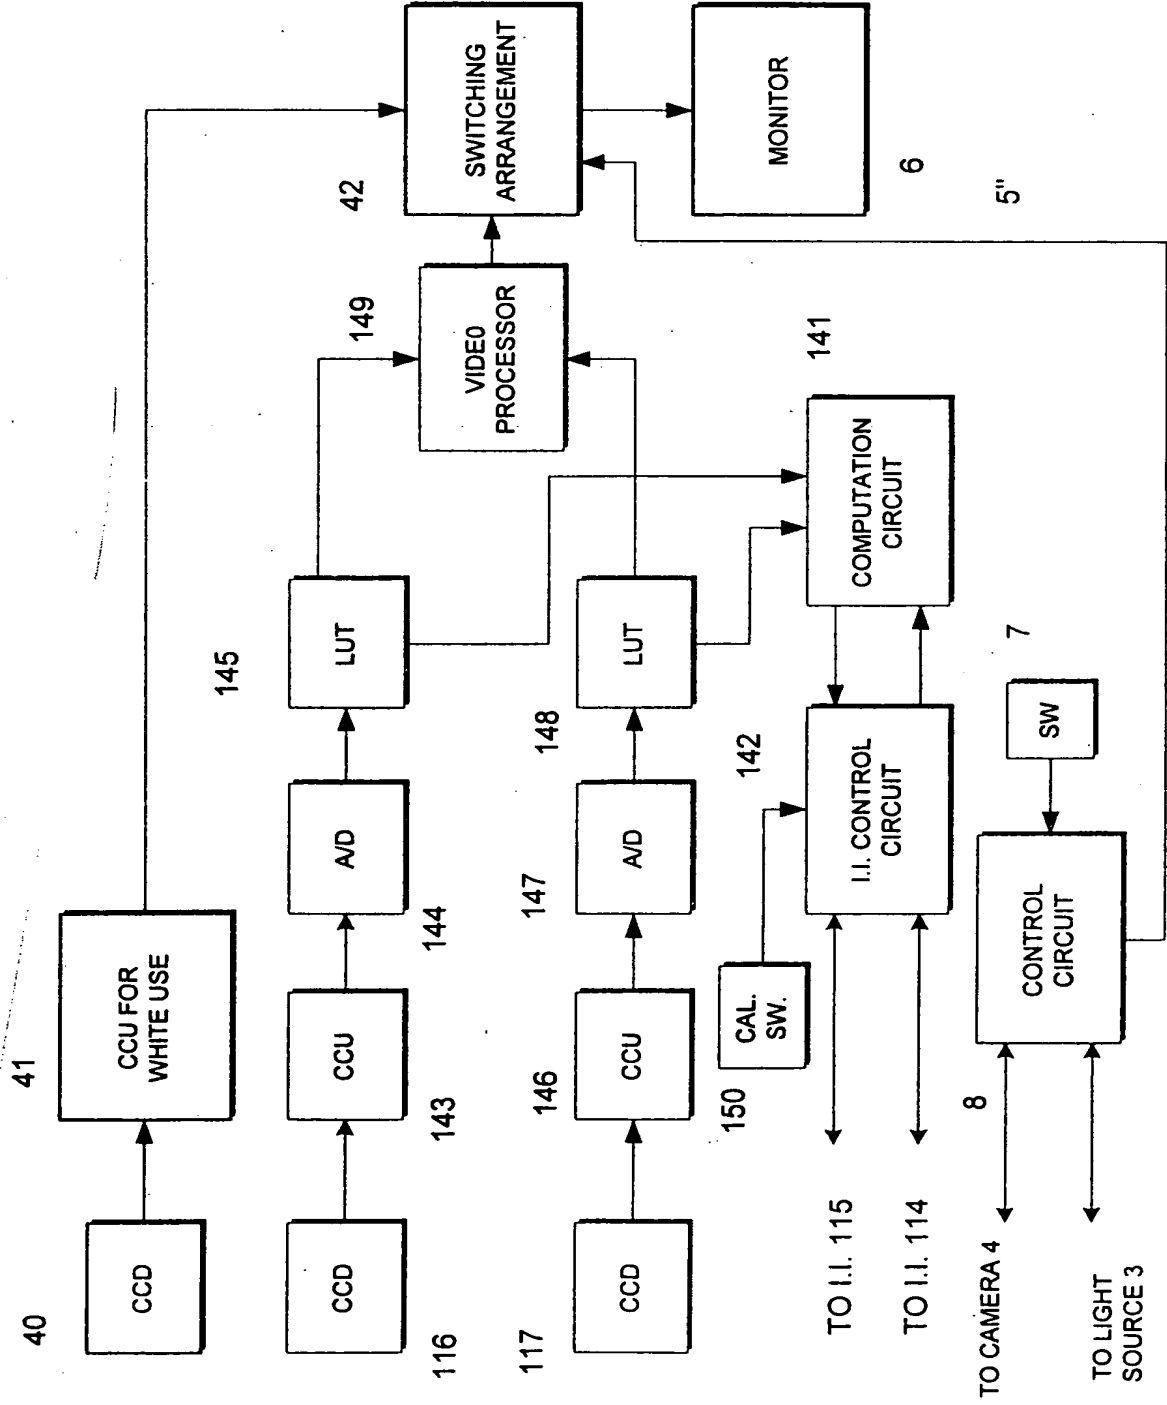


FIG. 19